

INDOOR CABLES

UNI-TUBE NON-METALLIC INDOOR CABLE

The Optical fibers (02-12F) are housed in single loose tubes that are made up of high-modulus plastic and filled with thixotropic jelly. Glass yarns are used to give extra strength and flexibility to cable. Low Smoke Zero Halogen (LSZH) jacket is extruded to make the cable as an indoor FOC.

Applications


Suitable for indoor, duct application

Cable Structure

1. Optical Fibers
2. Loose tube with gel
3. Water blocking yarn
4. Glass Yarns
5. LSZH jacket

Features

- Choice of fiber type
- Good crush resistant
- Extra light weight
- Used within building installation
- PE/LSZH Sheath

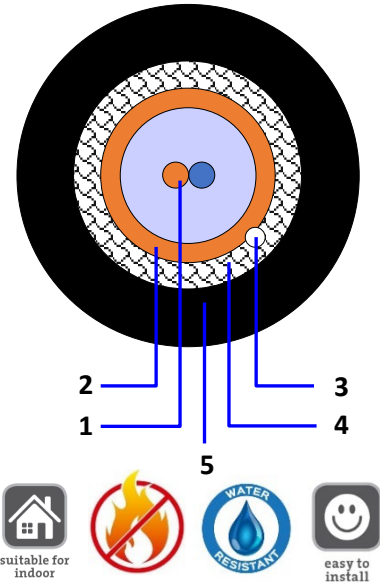

Specification

Fiber Count	Part Number	Fiber per Tube/Tube Count	Nominal Outer Dia (mm)	Weight (kg/km) Approx.	Tensile Strength (N)	Crush Strength (N)	Min. Bend Radius Operation (mm)	Min. Bend Radius Installation (mm)
2	PC-OFC-16-SM-01-002	2/1	5.5	42	1000	500	10 x OD	20 x OD
4	PC-OFC-16-SM-01-004	4/1	5.5	42	1000	500	10 x OD	20 x OD
6	PC-OFC-16-SM-01-006	6/1	5.5	42	1000	500	10 x OD	20 x OD
8	PC-OFC-16-SM-01-008	8/1	5.5	43	1000	500	10 x OD	20 x OD
12	PC-OFC-16-SM-01-012	12/1	5.5	44	1000	500	10 x OD	20 x OD

*Specifications are subjected to change without any prior notice

Temperature Range		Fiber Attributes		
Storage	-40 °C to 70 °C (-40 °F to 158 °F)	Fiber Name	Single Mode (G.652.D)	Single Mode (G.657.A1)
Installation	-30 °C to 70 °C (-22 °F to 158 °F)	Wavelengths (nm)	1310/1383/1550	1310/1550/1625
Operating	-30 °C to 70 °C (-22 °F to 158 °F)	Maximum Attenuation(dB/km)	0.4/0.4/0.25	0.35/0.21/0.23

* Standard in Compliance: IEC 60793, IEC 60794. For detail specification, consult technical department of Premier Cables (Pvt) Ltd.

Note:

- * Cable marking as per customer requirement.
- * Delivery length available in 2km and 4km or as per requirement.