


GAMMON TECHNICAL PRODUCTS, INC.

P.O.BOX 400 - 2300 HWY 34 MANASQUAN, N.J. 08736

PHONE 732-223-4600 FAX 732-223-5778 WEBSITE www.gammontech.com STORE www.gammontechstore.com PORTABLE PUMP

BULLETIN 49 (07-21)

SERVICEMAN'S PORTABLE PUMP

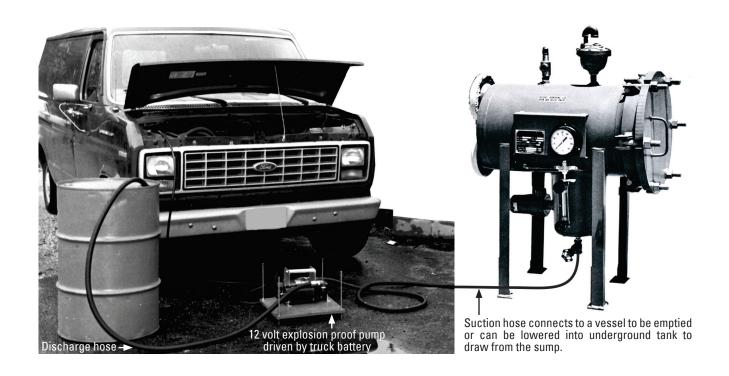

TECHNICAL DATA

Positive Displacement Pump Suitable for Gasoline, Diesel, and Jet Fuels 12 ft. Cable - Shielded Clips

WEIGHT 45 lbs.

DUTY CYCLE 30 min. on, 30 min. off POWER See model numbers

(explosion proof motor - Class 1,

Division 1)

SUCTION HOSE 3/4" x 12'
DISCHARGE HOSE 3/4" x 12'
FLOW RATE 14 gpm

HOW TO ORDER

Model GTP-1288-12 12 volt DC motor
GTP-1288-24 24 volt DC motor
GTP-1288-120 120 volt AC motor

OPTIONS: Suction strainer GTP-1289

Special length hose

Quick disconnect hose fittings

INSTRUCTIONS

Connect the suction and discharge hoses as desired. Attach cable clips to battery. Turn on the switch. Open filter vent.

NOTE: The D.C. pump has a permanent magnet motor and must be connected correctly or it will run backwards.